


DESCRIPTION

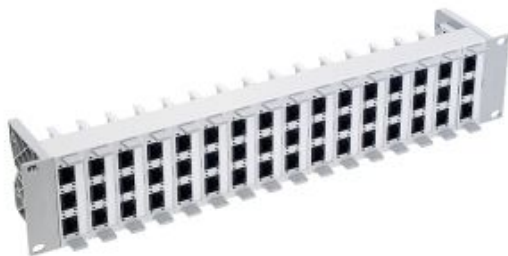

090.3109

SCOPE OF SUPPLY

- 19" 2U Global patch panel/u
- 16 connection module holders 2U Global/u
- 48 Cat. 6 connection modules, RJ45/u incl. dust covers
- Labeling strips
- 19" mounting kit
- Cable ties
- Installation instructions

TENDER

Modular patch panel accommodating up to sixteen connection module holders 2U Global/u, installation-friendly thanks to snap-and-go technique, 2U Global blind cover. Designed to accommodate the R&M security and the R&M environment system, with its 3-level protection concept: color coding, mechanical coding, locking option. Exchangeable labeling strips, fastening kit, labeling fields, tool-free locking and unlocking system. Profile aluminum, colorless chromated; side panel plastic (PC), fiberglass-reinforced, halogen-free, color medium gray (NCS 2502-B).

Connection module holder 2U Global, unshielded, plastic (PC), halogen-free, color light gray (NCS 1005-R80B).

RJ45 connection module of Category 6, for the establishing of transmission channels of class E with up to 4 plugged connections, complies with Category 6 requirements of the standards ISO/IEC 11801, EN 50173-1, (DIN EN 50173-1) as well as TIA/EIA 568.2-D, de-embedded tested in acc. with IEC 60603-7-4, interoperable and backwards compatible with Cat. 5e and Cat. 5.

Suitable for 10GBASE-T applications in acc. with IEEE 802.3™ Section Four up to 500 MHz and 55 m.

Tested on the basis of the R&M production control including 100% routine test.

Compatible with RJ standard plugs (RJ11, RJ12, RJ45), PCB-free and tool-free Easy-Lock connection of installation cables AWG 26 22 (0.4 mm 0.65 mm) and flexible cables AWG 26/7 AWG 22/7. Parallel pair termination without crossover in acc. with TIA 568-A/B, gold-plated bronze contacts for >1000 mating cycles, IDC contacts with single-wire strain relief and >20 insertion cycles, contact resistance <50 mOhm, dielectric strength >1000 Veff. PoE and PoE+ compatible according to IEC 60512-99-001. With integral cable strain relief, including dust cover.

Material: halogen-free and heavy-metal free in acc. with EU directives RoHS 2.

Connection module Cat. 6, unshielded, with dust cover, mounting plate, cable tie and installation instructions.

TECHNICAL DATA











DESCRIPTION	VALUE / VALUE RANGE
Number of connectors (A)	48
Category connector (A)	Cat. 6
Connector type (A)	RJ45












Shielding connector (A)	unshielded
PoE	Yes
Amount of height units	2 U
Rack mounting version	patch panel
Assembly	fully populated
Holder for connector / module	Module holder
Capacity (ports)	48
Standard	EN 50173-1 ISO/IEC 11801 IEC 60603-7: Electrical Characteristics of the Telecommunication Outlets
Amount of height units	2 U
Fastening	19 " U

MECHANICAL DATA

DESCRIPTION	VALUE / VALUE RANGE
Dimensions	482.6 mm x 88.1 mm x 82.0 mm / 19 in x 3.468 in x 3.228 in (W x H x D)
Color Code NCS	S 2502-B
Material	aluminum, plastic (PA/PC), fiber-glass reinforced

ACCESSORIES

Type	Picture	Description	Article	E-Number
Optional accessories		Plug Guard RJ45, green	R304825	977901245
Optional accessories		Plug Guard RJ45, red	R304826	977901265
Optional accessories		Plug Guard RJ45, white	R304827	977901215
Optional accessories		Hinged Dust Cover, anthracite	R305685	977901405
Optional accessories		Hinged Dust Cover, blue	R305686	977901425
Optional accessories		Hinged Dust Cover, brown	R305687	977901485
Optional accessories		Hinged Dust Cover, yellow	R305688	977901455
Optional accessories		Hinged Dust Cover, gray	R305689	977901555
Optional accessories		Hinged Dust Cover, green	R305690	977901445
Optional accessories		Hinged Dust Cover, red	R305691	977901465

Type	Picture	Description	Article	E-Number
Optional accessories		Hinged Dust Cover, violet	R305692	977901435
Optional accessories		Hinged Dust Cover, white	R305693	977901415
Optional accessories		Splash Cap IP54, blue	R306058	966907125
Optional accessories		Splash Cap IP54, yellow	R306060	966907155
Optional accessories		Splash Cap IP54, green	R306061	966907145
Optional accessories		Splash Cap IP54, red	R306062	966907165
Optional accessories		Splash Cap IP54, white	R306063	966907115
Optional accessories		19" 1U Cable Management Plastic, 70 mmR306179	R306179	966930015
Optional accessories		19" 2U Cable Management Plastic, 70 mmR306180	R306180	966930025
Optional accessories		Plug Reduction Frame RJ45 onto RJ11/R R310835	R310835	977990705
Optional accessories		Labeling Sheet 2U Global	R503380	966733285