



LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP LUGS WITH COMBINATION INDICATOR SIZE 000, 63A, AC 500V/DC 250V

Similar to image

Technical data:		
Current / for AC / rated value	A	63
Operating class of the fuse link		gG
Size of the fallback-system / acc. to DIN EN 60269-1		NH000
Supply voltage		
• for AC / rated value	V	500
• for DC	V	250
Switching capacity current		
• in accordance with IEC 60947-2 / rated value	kA	120
• with DC / in accordance with IEC 60947-2 / rated value	kA	25
Design of an identification indicator		Combination alarms
type of the assembly		Non-insulated grip lugs
Protection class IP		IP20, with connected conductors
Climatic class		-20 to +50 at 95% relative humidity

Certificates/approvals:

**General Product Approval**

CSA



GOST



KEMA



VDE





EG-Konf.

**Test Certificates**[Special Test Certificate](#)[Type Test Certificates/Test Report](#)

GL

**Shipping Approval****Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/lowvoltage/maill>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/3NA7822/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NA7822](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA7822)**CAX-Online-Generator**<http://www.siemens.com/cax>**Tender specifications**[Datenorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

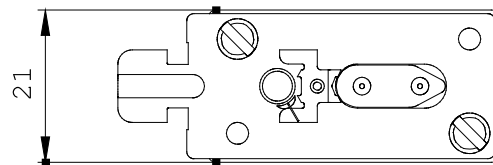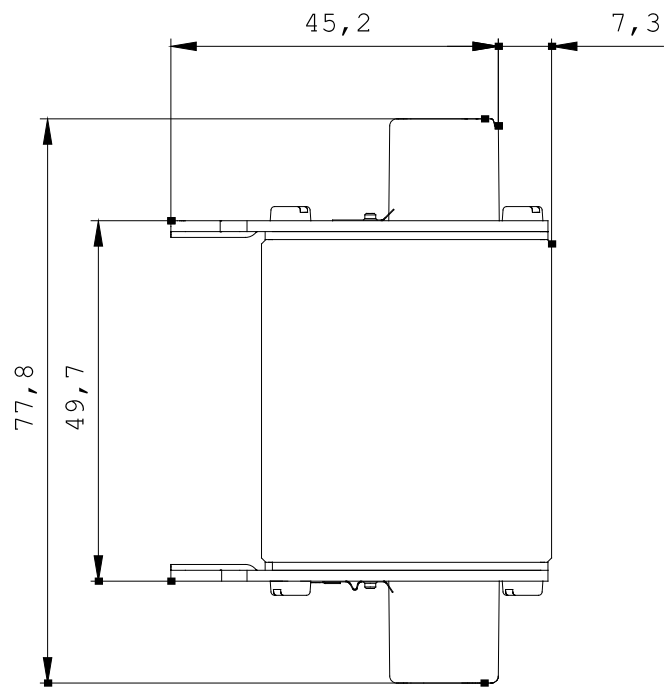

last change:

Mar 18, 2013