

UNDERVOLTAGE RELEASE DC 110V, WITH 2TERMINALS FOR LS-SWITCH 5SL4, 5SY, 5SP, RCBO 5SU1, RCD 5SV



Figure similar

General technical data	
Switching function / ON-delay/instantaneous contact	No
Type of voltage / for actuation	DC
Control current	
Control supply voltage	
• at DC / rated value / minimum	110 V
• at DC / rated value / maximum	110 V
Suitability	
Suitability for integration	
• motor starter protector	No
• overload relay	No
Suitability for use	
• load switch	No
• circuit breaker	No
Number	
Number of NC contacts	0

Number of NO contacts	0
Number of CO contacts	0

Connections

Type of electrical connection	screw-type terminals
-------------------------------	----------------------

Declaration of Conformity	other
---------------------------	-------



EG-Konf.

[Environmental Confirmations](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3044>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3044>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3044

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

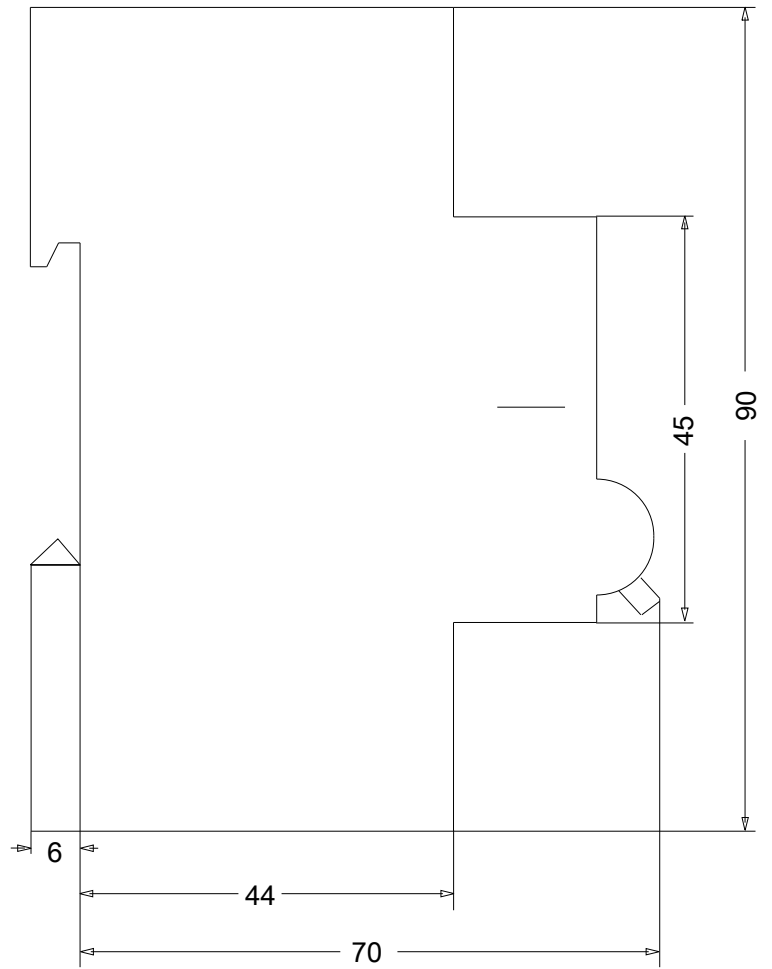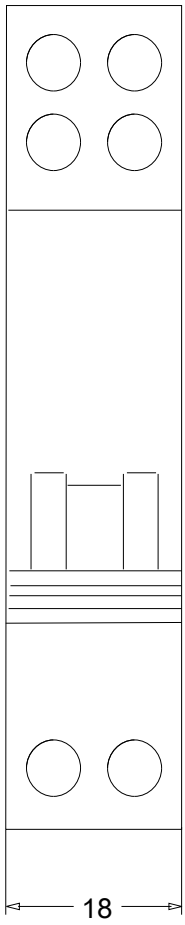

D1

U <

D2